

## Modular Changeover Switch

### Application

MACS-63 changeover switch is mainly used to change over the power supply between the mains power and the standby power manually for the load not bigger than 63A when it is necessary. Under the normal conditions, it is used as a switch disconnecter to switch on, load and break the circuit.

### Specification

Model	MACS-63
Number of poles	1P, 2P, 3P, 4P
Rated working voltage Ue	240V/415V
Frequency	50/60Hz
Rated current (A)	16,25,32,40,63
Standard	IEC60947-3
Icw	1000A/1s
Icm	3000A
Protection level	IP20
Contact form	1-0-2
Ambient Temperature	-5°C...40°C
Mounting	DIN rail EN60715 (35mm)




MACS-63 1P



MACS-63 2P

### Circuit Diagram

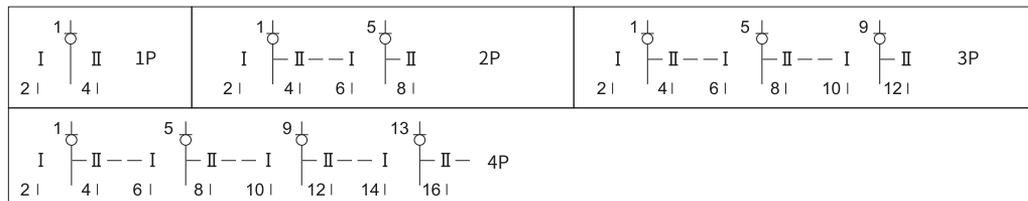

### Dimensions

